SCHEMATIC DIAGRAM

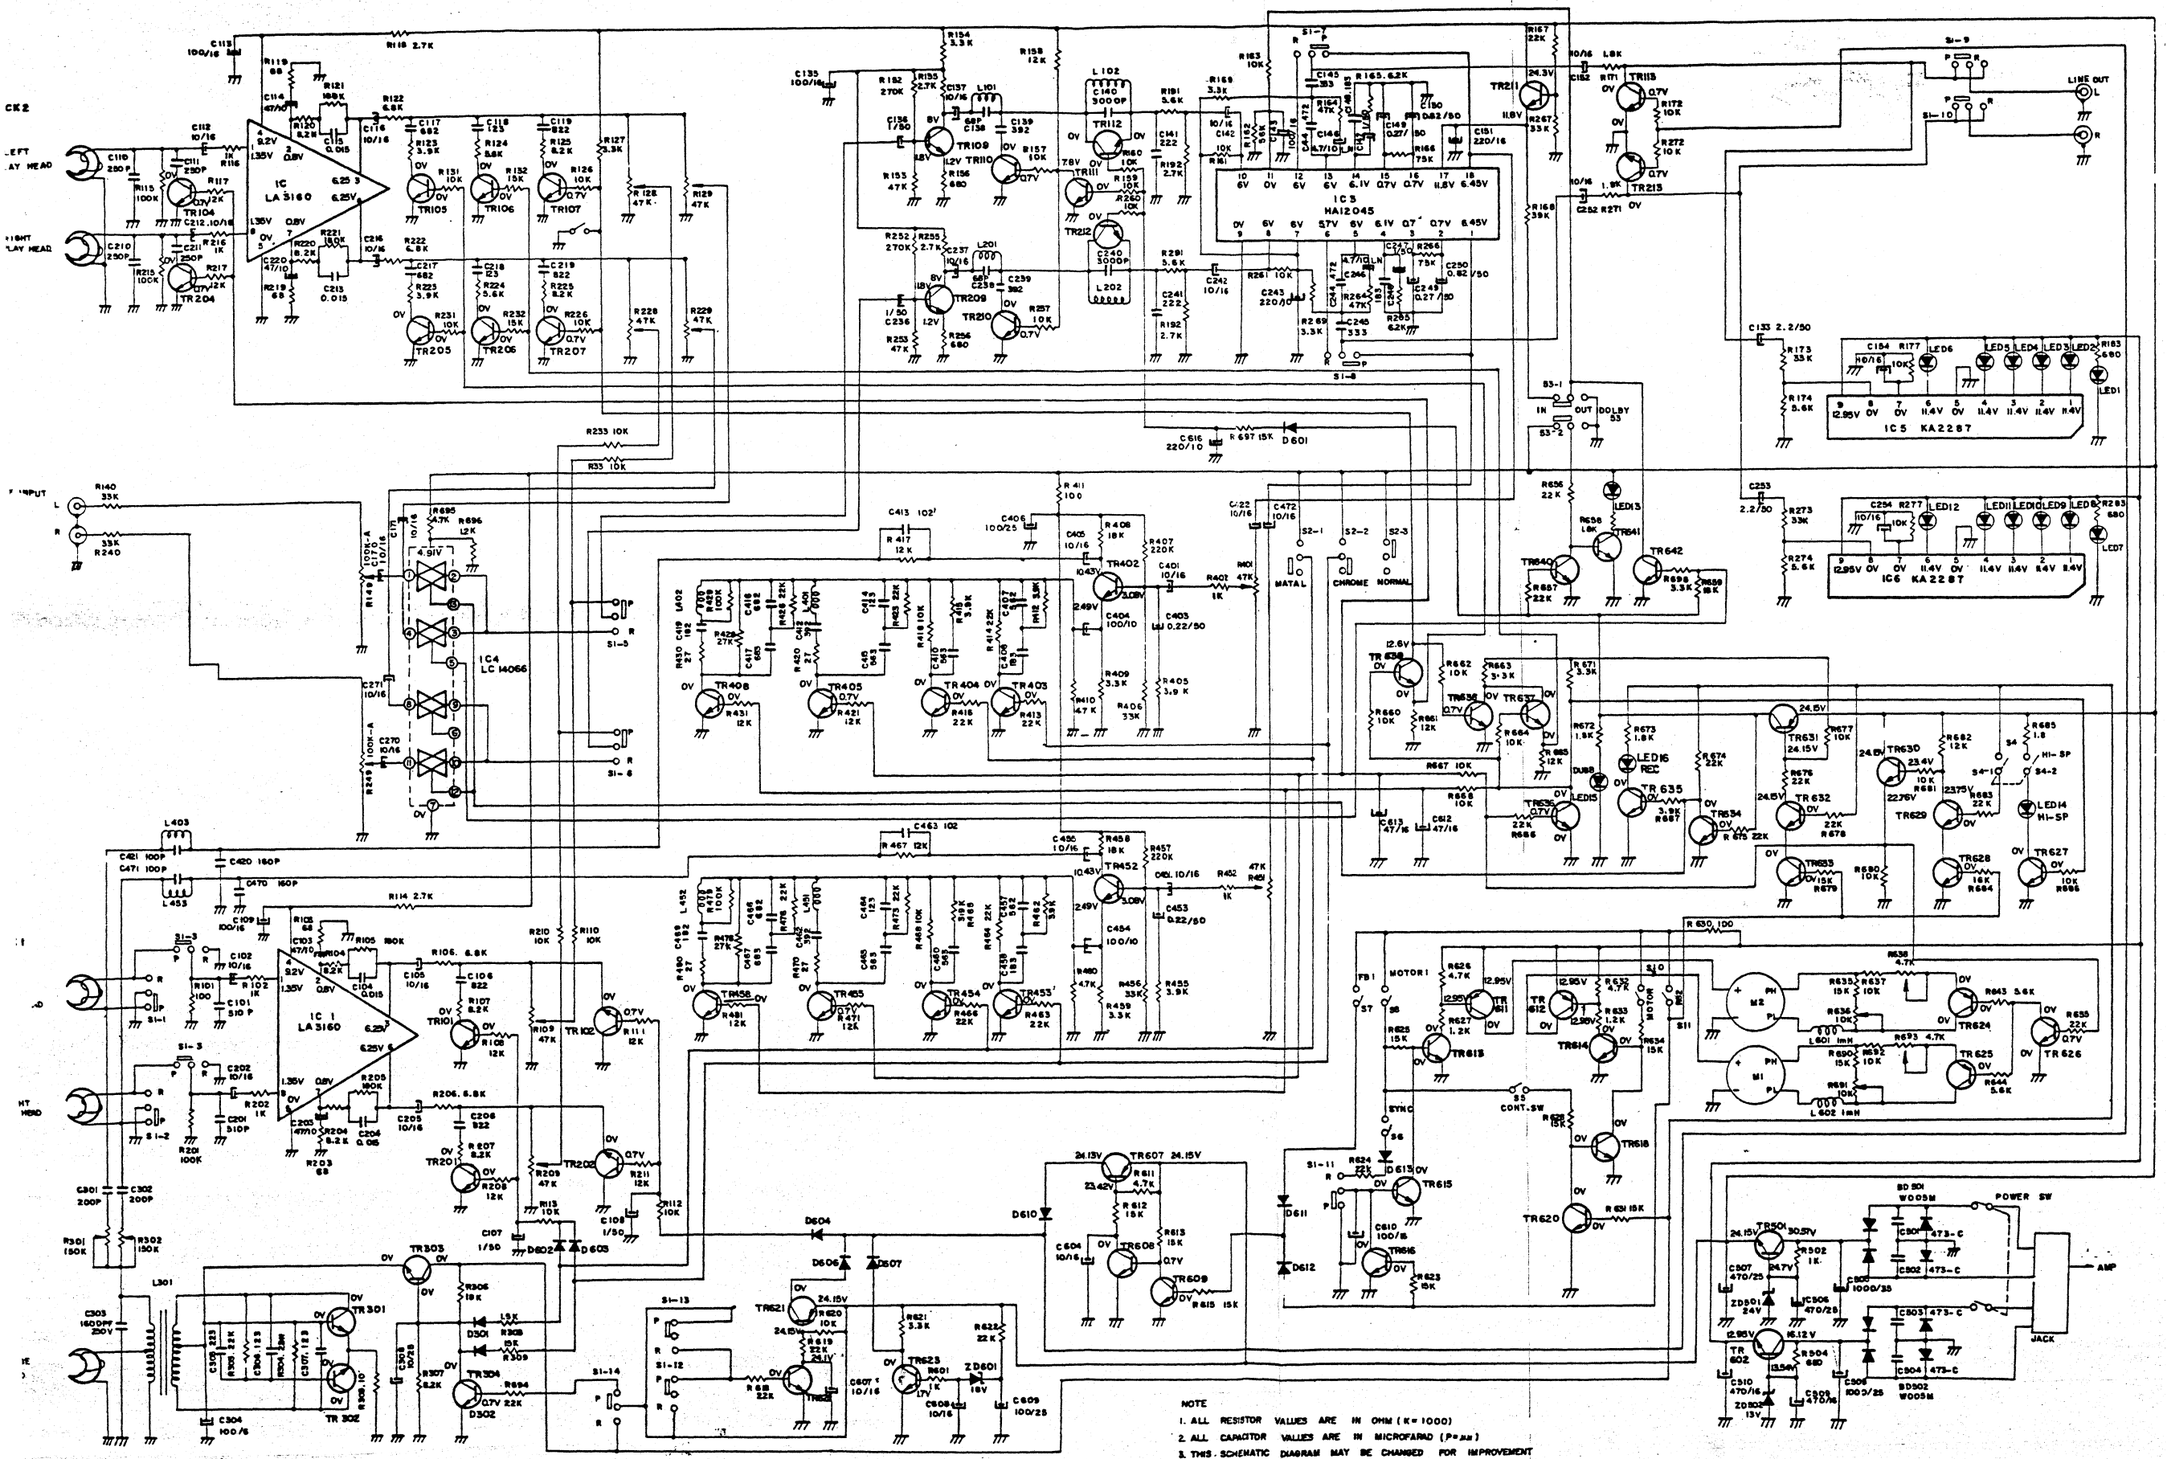

NOTE

1. ALL RESISTOR VALUES ARE IN OHM (K=1000)
2. ALL CAPACITOR VALUES ARE IN MICROFARAD (P=μμ)
3. THIS SCHEMATIC DIAGRAM MAY BE CHANGED FOR IMPROVEMENT OF PERFORMANCE WITHOUT NOTICE.
4. CHECK VOLTAGE IS MEASURED AT POWER SW "ON" AND OTHERS "OFF".

UNIVERSUM VTCF 4378

SCHEMATIC DIAGRAM

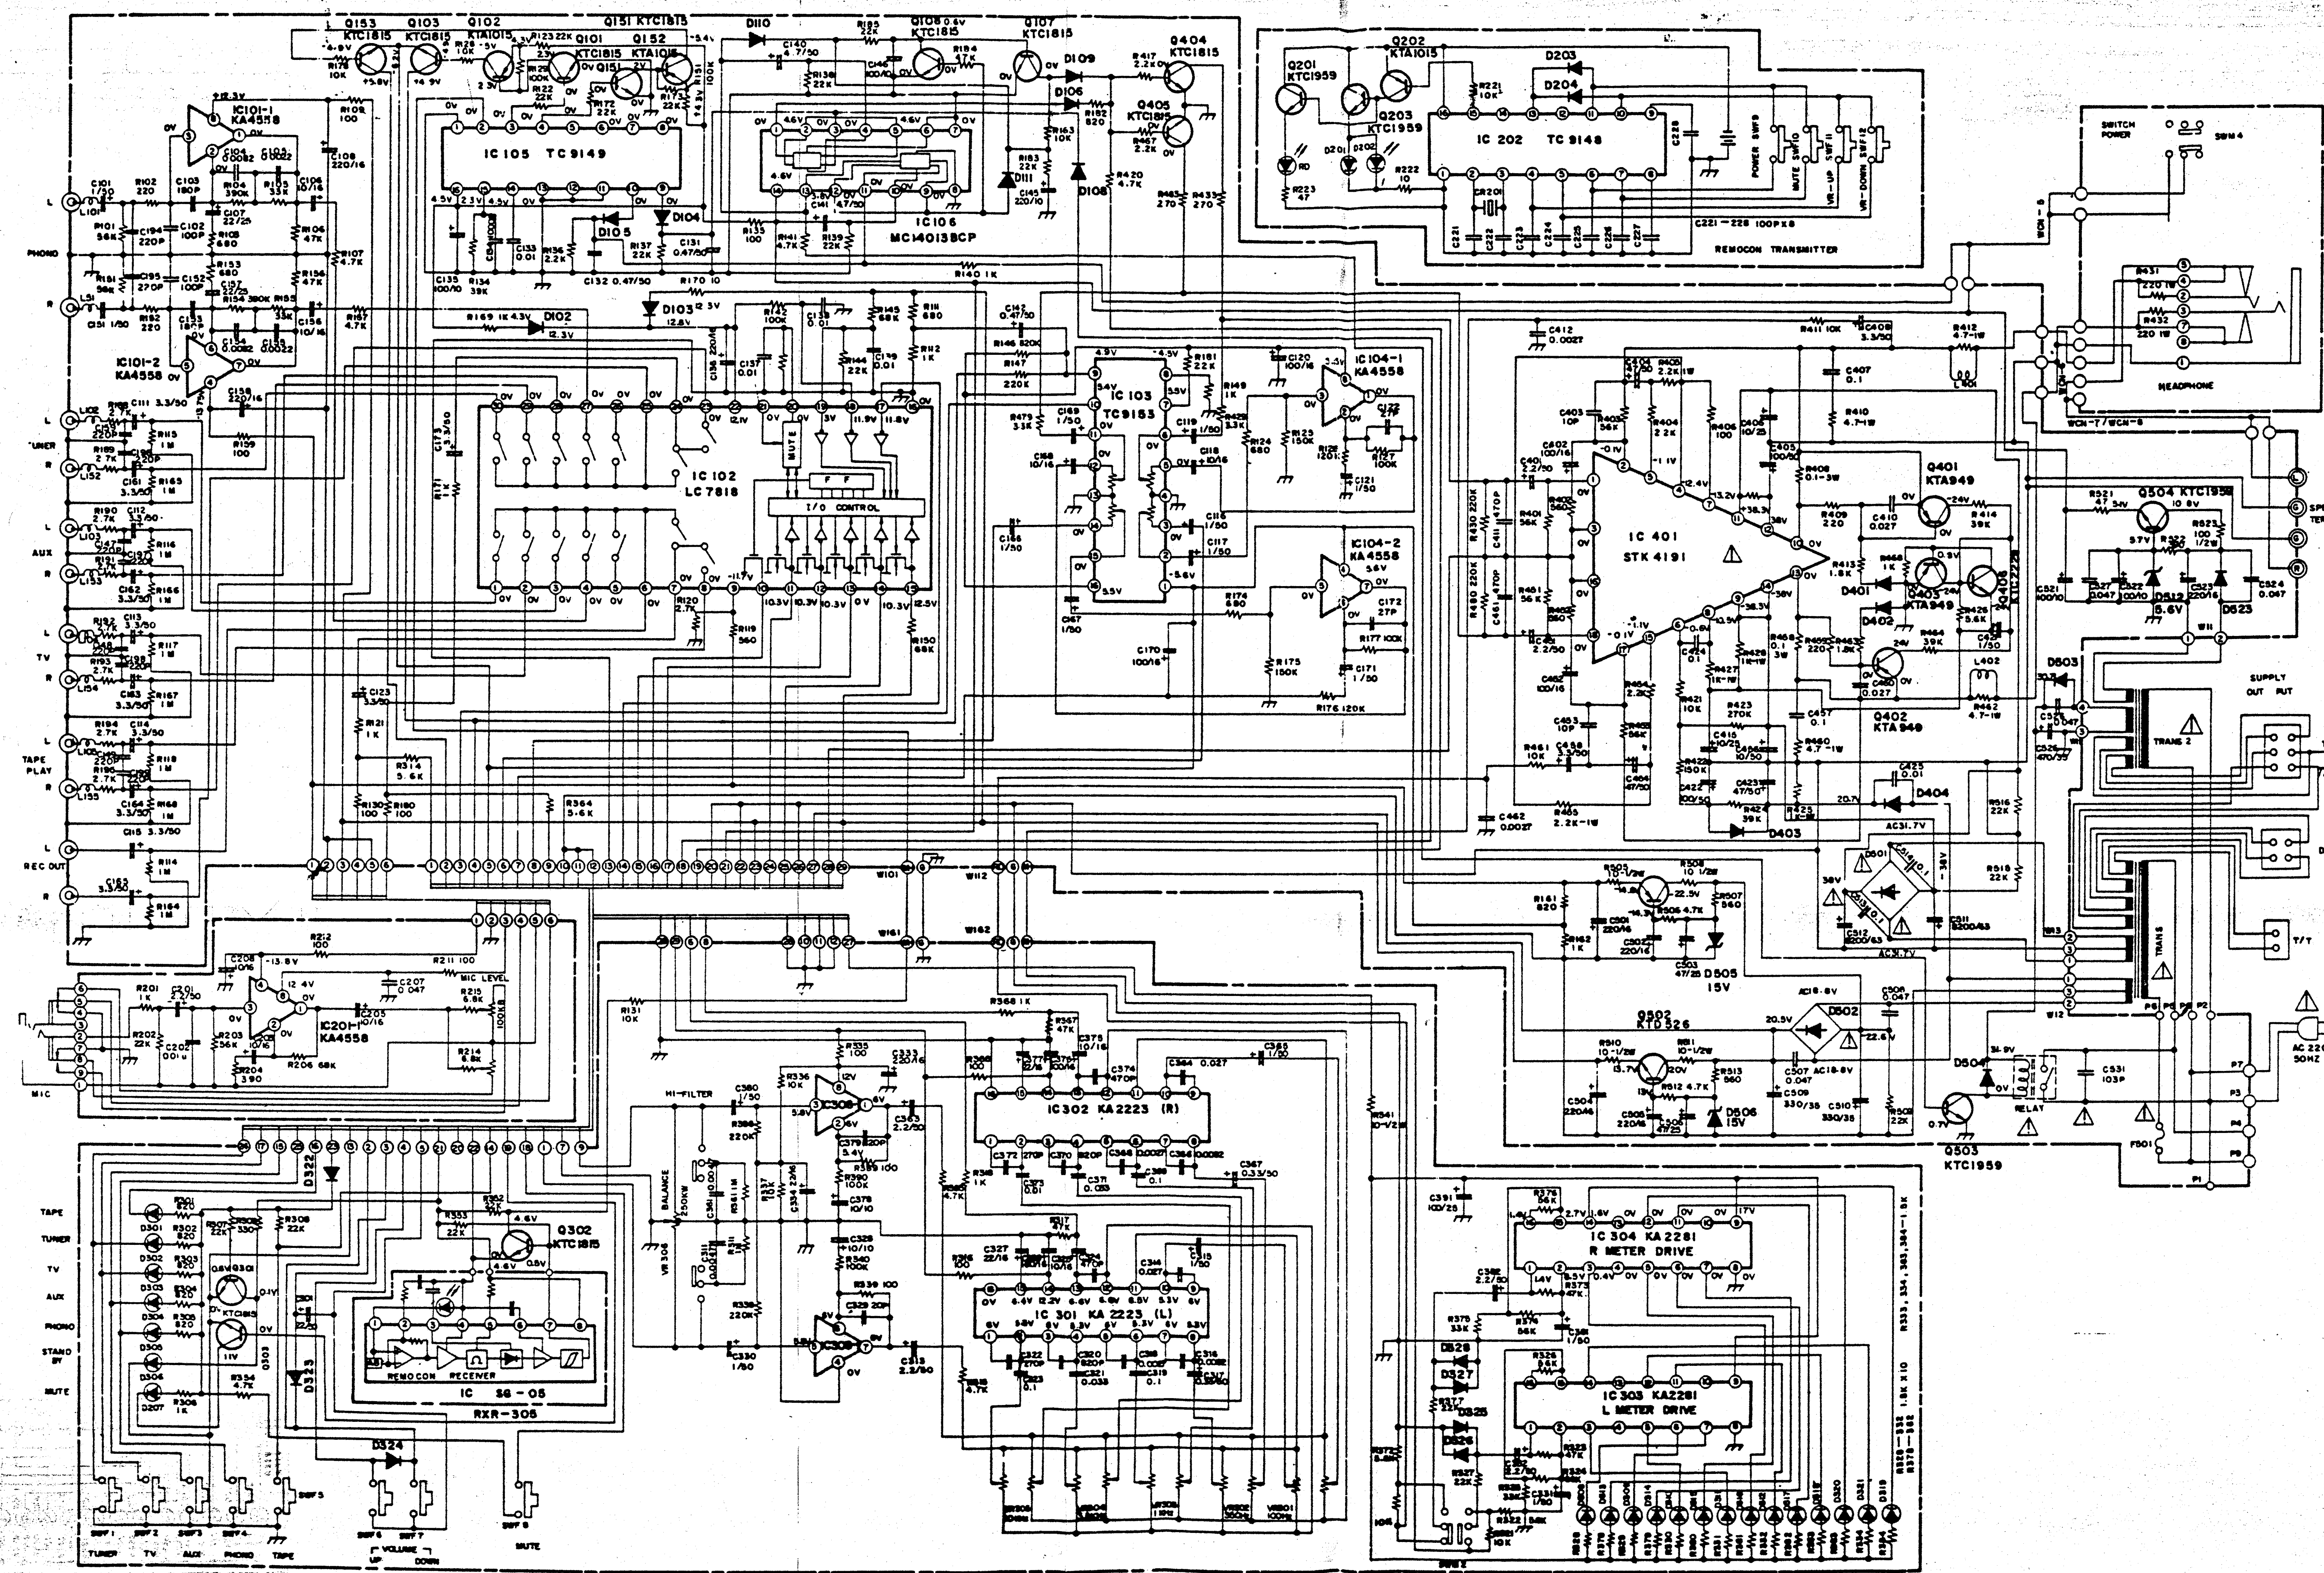
IC105 TC9149
IC106 MC14013BCP
IC101-1 KA4558
IC101-2 KA4558
IC102 LC7818
I/O CONTROL
MUTE
IC103 TC9153
IC104-1 KA4558
IC104-2 KA4558
IC202 TC9148
REMOCON TRANSMITTER
C221 — 228 100PX8
POWER SWF9
MUTE SWF10
VR-UP SWF11
VR-DOWN SWF12
SWITCH POWER
SWM4
HEADPHONE
IC401 STK4191
Q401 KTA949
Q402 KTA949
Q403 KTA949
Q404 KTC1815
Q405 KTC1815
Q406 KTC2229
Q504 KTC1959
SPEAKER TERMINAL
SUPPLY OUT PUT
TRANS 2
TUNER
DECK
T/T
TRANS
RELAY
Q502 KTD526
Q503 KTC1959
AC 220V 50HZ
PHONO
TUNER
AUX
TV
TAPE PLAY
REC OUT
MIC
MIC LEVEL
IC201-1 KA4558
HI-FILTER
BALANCE
VR306
IC302 KA2223 (R)
IC301 KA2223 (L)
IC304 KA2281 R METER DRIVE
IC303 KA2281 L METER DRIVE
IC SG-05
REMOCON RECEIVER
RXR-305
Q302 KTC1815
TAPE
TUNER
TV
AUX
PHONO
STAND BY
MUTE
SWF1 TUNER
SWF2 TV
SWF3 AUX
SWF4 PHONO
SWF5 TAPE
SWF6 SWF7 VOLUME UP DOWN
SWF8 MUTE

NOTES : 1. ALL RESISTANCE VALUES ARE INDICATED IN "Ω" (K=10³, M=10⁶Ω)
2. ALL CAPACITACE VALUES ARE INDICATED IN "UF" (P=10⁻⁶UF)
3. THIS SCHEMATIC DIAGRAM MAY BE CHANGED WITHOUT NOTICE FOR IMPROVEMENT OF PERFORMANCE.

UNIVERSUM VTCF 4378

SCHEMATIC DIAGRAM

UNIVERSUM

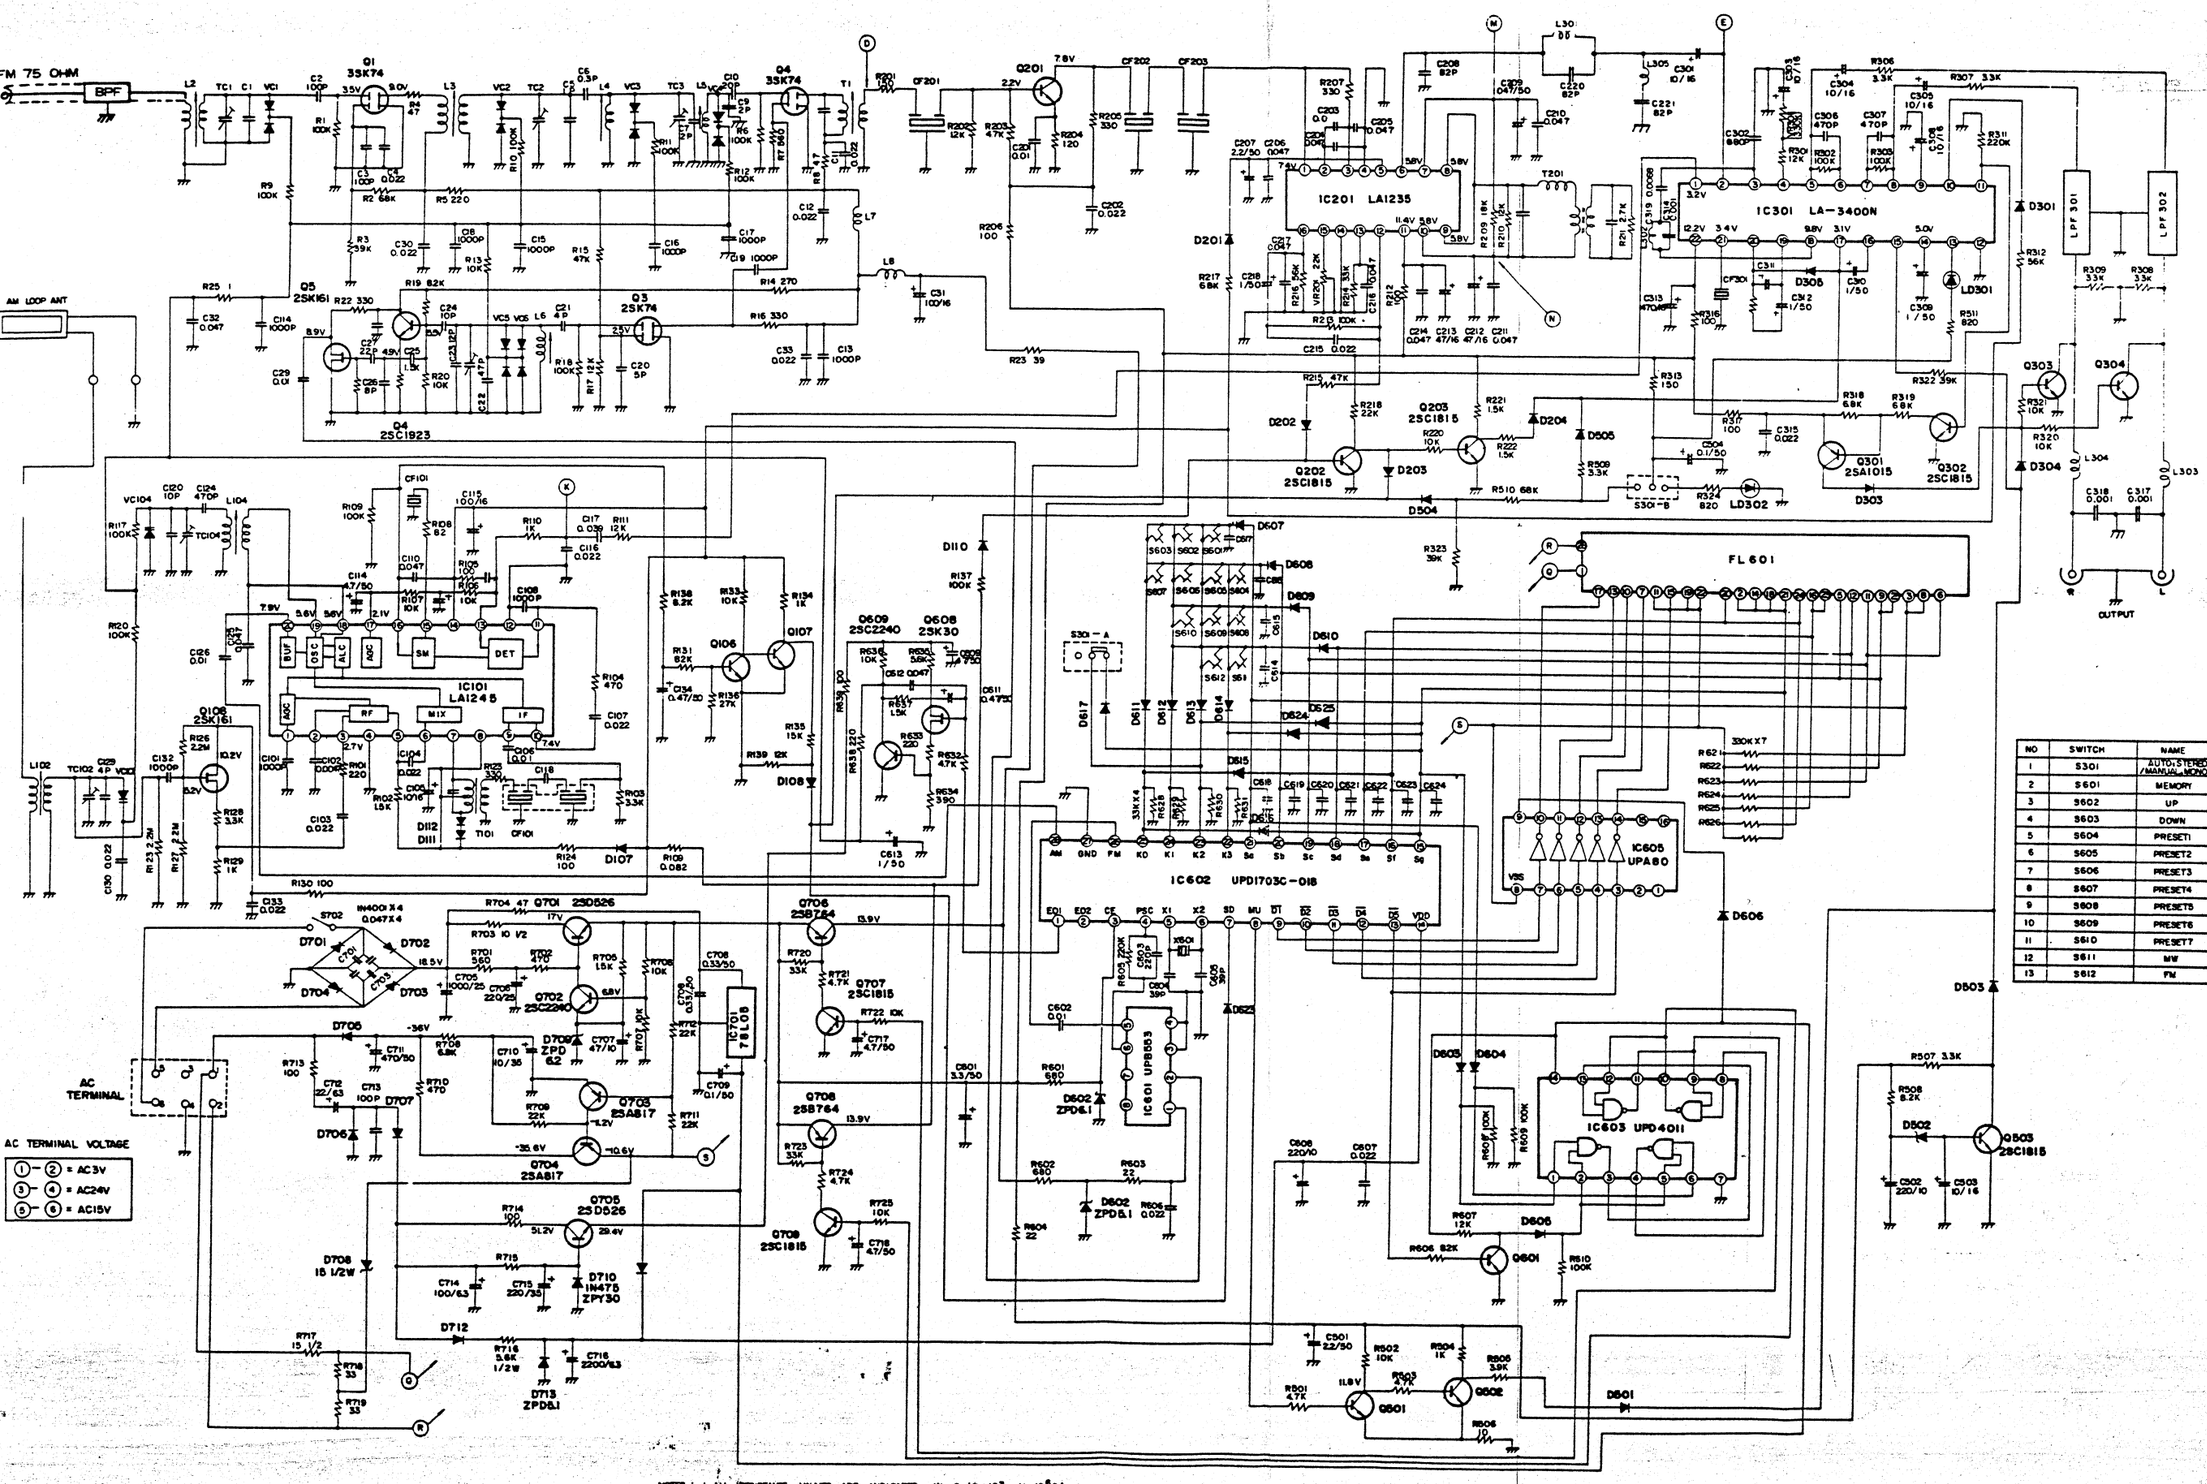

NO	SWITCH	NAME
1	S301	AUTO/STEREO /MANUAL-MONO
2	S601	MEMORY
3	S602	UP
4	S603	DOWN
5	S604	PRESET1
6	S605	PRESET2
7	S606	PRESET3
8	S607	PRESET4
9	S608	PRESET5
10	S609	PRESET6
11	S610	PRESET7
12	S611	MW
13	S612	FM

NOTES : 1. ALL RESISTANCE VALUES ARE INDICATED IN Ω. (K=10³ M=10⁶Ω)
2. ALL CAPACITANCE VALUES ARE INDICATED IN UF (P=10⁻⁶UF)
3. THIS SCHEMATIC DIAGRAM MAY BE CHANGED WITHOUT NOTICE FOR IMPROVEMENT OF PERFORMANCE.

UNIVERSUM VTCF4378